


NEW

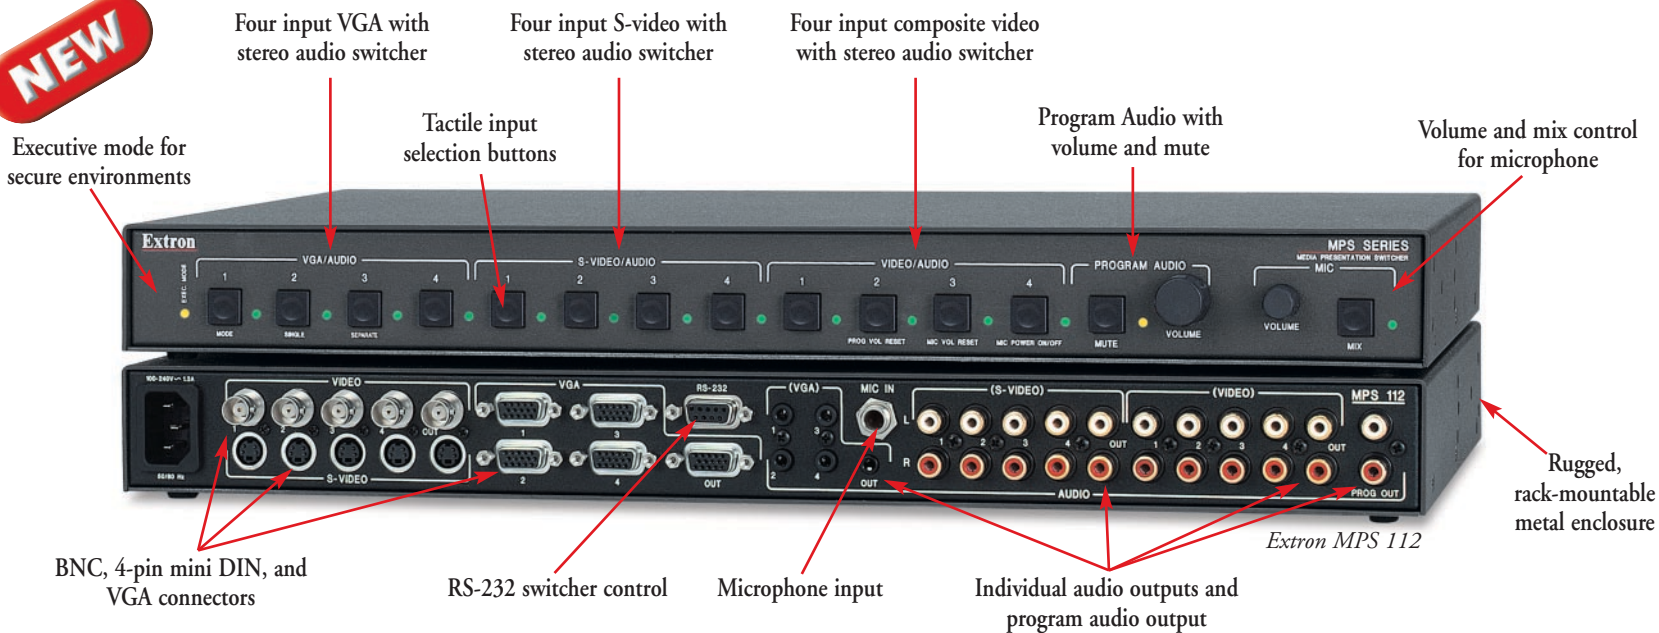


Extron® MPS 112

Three Switchers in One Box

The Extron **MPS 112** Media Presentation Switcher combines three independent, four input, one output switchers in a single enclosure: VGA with stereo audio; S-video with stereo audio; and composite video with stereo audio. The easy-to-integrate MPS 112 is a cost-effective solution for signal routing applications that usually require three separate switchers, such as small conference rooms, boardrooms, and classrooms.

Key Features:

- **Bandwidth**– 350 MHz (-3dB) RGB video bandwidth maintains signal integrity.
- **Program Audio switcher**– Provides volume and mute control while switching stereo audio output between all of the sources (VGA with stereo audio, S-video with stereo audio, and composite with stereo audio) and the microphone input.
- **Single Switcher mode**– Allows one-touch switching. When one of the 12 inputs is selected, the signal from that input is routed to the output of its group, as well as to the Program Audio output. Outputs of the other groups are muted.
- **Separate Switcher mode**– Allows independent switching to the outputs of any given I/O group. This effectively breaks the MPS down to three separate switchers in one box. The Program Audio is able to output the audio signal from one group, while cueing up from another group without interruption.
- **Microphone input**– Complete with volume and mix control, the MPS 112 enable presenters voice accompaniment with an unbalanced mono microphone input on a 1/4 in./6.3 mm audio connector.
- **“Talk Over” mode**– When a microphone is used in a presentation, the “talk over” mode will lower the program audio level to an appropriate level, allowing the presenter’s voice to be heard clearly over the audio accompaniment.
- **RS-232 control**– A rear panel, RS-232 port enables control via a third party control system. Extron’s Simple Instruction Set (SIS™) allows for quick and easy programming.

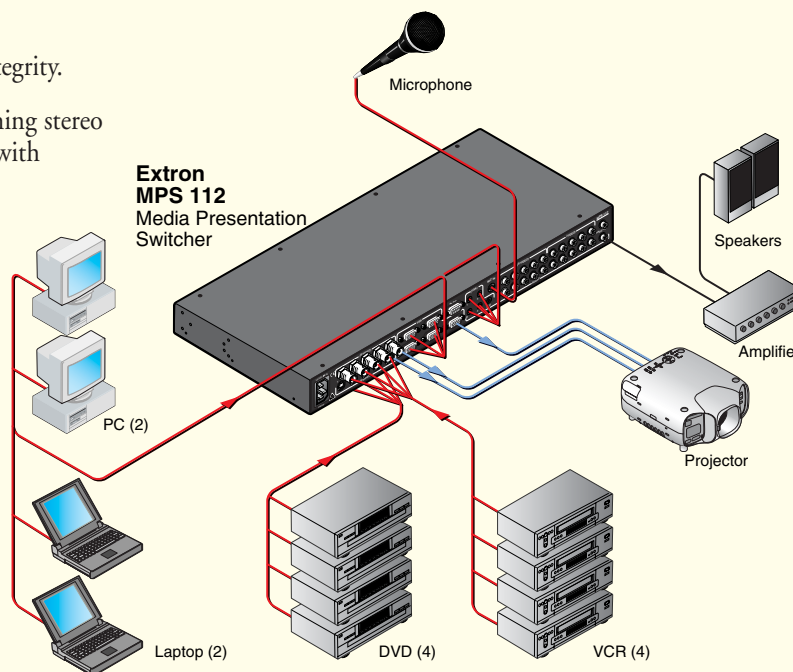

Three Switchers In One Box

	Video Signal Type	Video Connectors	Stereo Audio Connectors	Inputs	Outputs
1	VGA	15-pin HD	3.5 mm female stereo mini jack	4	1
2	S-Video	4-pin mini DIN	RCA	4	1
3	Composite Video	BNC	RCA	4	1

www.extron.com/53/mps112



Extron® Electronics

INTERFACING, SWITCHING AND DISTRIBUTION

+31.33.453.4040 • +800.3987.6673

www.extron.com